


CONNECTEUR *Connecting link*

Manille


Shackle

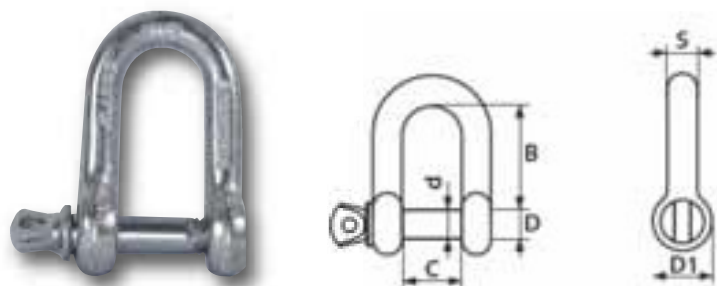

MANILLE DROITE STANDARD - COMMERCIALE

Marquée CEE, Diamètre, C.M.U, fabricant - Ratio sécurité: 4:1
Stamped CEE, Diameter, W.L.L. brand - Safety ratio: 4:1

Diam. mm	B mm	C mm	Poids Kg/pc	C.M.U Kg	Réf.	
					Galvanisé à froid	Galvanisé à chaud
5	19	10	0,02	60	608005	608405
6	24	12	0,03	100	608006	608406
8	32	16	0,06	200	608008	608408
10	40	20	0,11	300	608010	608410
12	48	25	0,22	500	608012	608412
14	56	28	0,32	650	608014	608414
16	64	32	0,47	800	608016	608416
18	71	36	0,75	1000	608018	608418
19/20	76	38	0,79	1000	608019	608419
22	85	44	1,33	1500	608022	608422
25	95	50	1,76	2000	608025	608425
28	106	56	2,51	3000	608028	608428
32	120	64	4,10	3500	608032	--
38	145	76	7,35	5000	608038	--

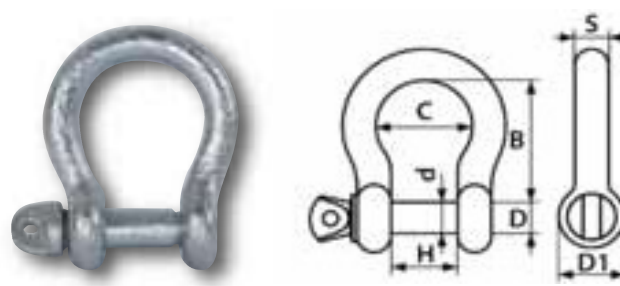

MANILLE LYRE STANDARD - COMMERCIALE


Marquée CEE, Diamètre, C.M.U, fabricant - Ratio sécurité: 4:1
Stamped CEE, Diameter, W.L.L. brand - Safety ratio: 4:1

Diam. mm	B mm	H mm	C mm	Poids Kg/pc	C.M.U Kg	Réf.	
						Galvanisé à froid	Galvanisé à chaud
5	19,5	10	15	0,02	60	609005	609405
6	24	12	18	0,03	100	609006	609406
8	32	16	24	0,06	200	609008	609408
10	40	20	30	0,11	300	609010	609410
12	49	25	36	0,22	500	609012	609412
14	59	28	42	0,32	650	609014	609414
16	64	32	48	0,47	800	609016	609416
18	71	36	54	0,70	1000	609018	609418
19/20	80	38	60	0,79	1000	609019	609419
22	85	44	66	1,33	1500	609022	609422
25	100	50	75	1,73	2000	609025	609425
28	116	56	85	2,51	3000	609028	609428
32	129	64	96	4,10	3500	609032	--
38	151	76	114	6,90	5000	609038	--



Manille estampillée


Shackle



MANILLE DROITE ESTAMPILLEE

Marquée CEE, Diamètre, C.M.U, fabricant, numéro série - Ratio sécurité: 5:1
Stamped CEE, Diameter, W.L.L. brand, serial number - Safety ratio: 5:1

Diam. mm	B mm	C mm	S mm	Poids Kg/pc	C.M.U Kg	Réf. Galvanisé à froid
6	25	12	5	0,03	100	607060
8	33	16	6,5	0,05	250	607000
10	42	20	8	0,09	400	607001
12	50	24	9,5	0,17	600	607003
14	57	28	11	0,26	800	607004
16	61	32	13	0,34	1000	607005
20	70	40	16	0,67	1600	607007
22	74	44	17,5	0,90	2000	607008
25	80	48	19	1,22	2800	607009
28	90	40	26	2,20	3150	607010
32	100	45	29	2,85	4000	607011
36	110	50	32	4,40	5000	607012




MANILLE LYRE ESTAMPILLEE

Marquée CEE, Diamètre, C.M.U, fabricant, numéro série - Ratio sécurité: 5:1
Stamped CEE, Diameter, W.L.L. brand, serial number - Safety ratio: 5:1

Diam. mm	B mm	C mm	H mm	S mm	Poids Kg/pc	C.M.U Kg	Réf. Galvanisé à froid
6	24	20	12	6	0,03	100	607160
8	32	24	16	8	0,07	200	607100
10	40	33	20	10	0,13	300	607101
12	48	39	24	12	0,26	500	607103
14	56	46	28	14	0,40	600	607104
16	64	46	32	16	0,50	800	607105
20	80	65	40	20	0,80	1100	607107
22	88	72	44	22	1,30	1500	607108
25	100	81	50	25	2,00	2000	607109
28	112	91	56	28	3,10	2600	607110
32	128	104	64	32	4,30	3200	607111

Manille HR


Lifting shackle

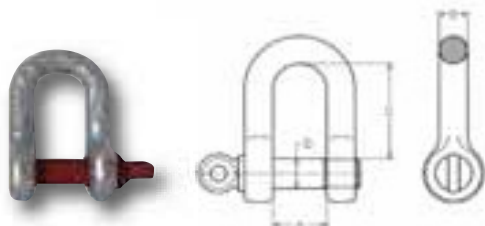

MANILLE DROITE HR AVEC MANILLON À ŒIL

Marquée CEE, C.M.U, fabricant - Ratio sécurité: 5:1
Stamped CEE, W.L.L. brand - Safety ratio: 5:1


C.M.U. / W.L.L.	C mm	A mm	B mm	D mm	Poids Kg/pc	Réf.
0,5 t	22,4	11,9	6,35	7,85	0,05	609301
1 t	31,8	16,8	9,65	11,2	0,13	609302
1,5 t	36,6	19,1	11,2	12,7	0,20	609303
2 t	41,4	20,6	12,7	16	0,27	609304
3,25 t	51	26,9	16	19,1	0,57	609305
4,75 t	60,5	31,8	19,1	22,4	1,20	609306
6,5 t	71,5	36,6	22,4	25,4	1,43	609307
8,5 t	81	42,9	25,4	28,7	2,15	609308
9,5 t	91	46	28,7	31,8	3,06	609309
12 t	100	51,5	31,8	35,1	4,11	609310
13,5 t	111	57	35,1	38,1	5,28	609311
17 t	122	60,5	38,1	41,4	7,23	609312
25 t	146	73	44,5	51	12,10	609313

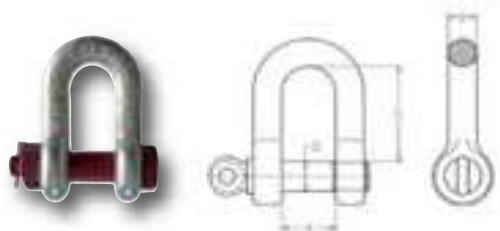

MANILLE DROITE HR AVEC AXE GOUPILLÉ

Marquée CEE, C.M.U, fabricant - Ratio sécurité: 5:1
Stamped CEE, W.L.L. brand - Safety ratio: 5:1

C.M.U. / W.L.L.	C mm	A mm	D mm	B mm	Poids Kg/pc	Réf.
0,5 t	22,4	11,9	7,85	6,35	0,05	609201
1 t	31,8	16,8	11,2	9,65	0,11	609202
1,5 t	36,6	19,1	12,7	11,2	0,18	609203
2 t	41	20,6	16	12,7	0,23	609204
3,25 t	51	26,9	19,1	16	0,55	609205
4,75 t	60,5	31,8	22,4	19,1	0,91	609206
6,5 t	71,5	36,6	25,4	22,4	1,49	609207
8,5 t	81	42,9	28,7	25,4	2,15	609208
9,5 t	91	46	31,8	28,7	2,86	609209
12 t	100	51,5	35,1	31,8	4,08	609210
13,5 t	111	57	38,1	35,1	5,44	609211
17 t	122	60,5	41,4	38,1	7,33	609212
25 t	146	73	51	44,5	13,60	609213

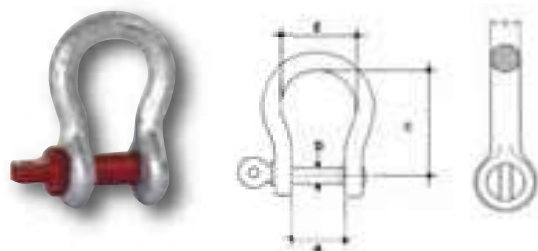

MANILLE LYRE HR AVEC MANILLON À ŒIL

Marquée CEE, C.M.U, fabricant - Ratio sécurité: 5:1
Stamped CEE, W.L.L. brand - Safety ratio: 5:1


C.M.U. / W.L.L.	C mm	E mm	A mm	D mm	B mm	Poids Kg/pc	Réf.
0,5 t	28,7	19,8	11,9	7,85	6,35	0,05	609101
1 t	36,6	26,2	16,8	11,2	9,65	0,14	609102
1,5 t	42,9	29,5	19,1	12,7	11,2	0,17	609103
2 t	47,8	33,3	20,6	16	12,7	0,33	609104
3,25 t	60,5	42,9	27	19,1	16	0,62	609105
4,75 t	71,5	51	31,8	22,4	19,1	1,07	609106
6,5 t	84	58	36,6	25,4	22,4	1,64	609107
8,5 t	95,5	68,5	42,9	28,7	25,4	2,28	609108
9,5 t	108	74	46	31,8	29,5	3,36	609109
12 t	119	82,5	51,5	35,1	32,8	4,31	609110
13,5 t	133	92	57	38,1	36,1	6,14	609111
17 t	146	98,5	60,5	41,4	39,1	7,80	609112
25 t	146	127	73	51	44,5	12,10	609113

C.M.U. : Charge Maximale d'Utilisation = W.L.L. : Working Load Limit



Emerillon

Swivel

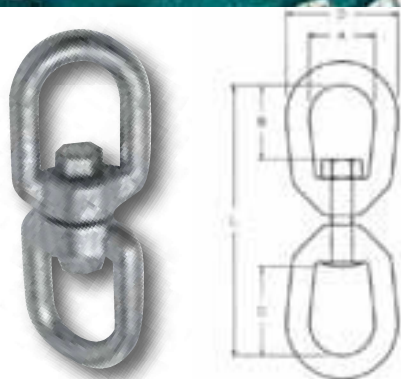

EMERILLON - DOUBLE GRAND ŒIL

Galvanisé à chaud, Marqué CEE, C.M.U, fabricant - Ratio sécurité: 5:1
Hot dipped galvanized, stamped CEE, W.L.L. brand - Safety ratio: 5:1

Diam. mm	A mm	B mm	C mm	D mm	L mm	C.M.U W.L.L. Kg	Poids Kg/pc	Réf.
8	25,4	20,6	31,7	41,3	90,5	250	0,16	613011
10	31,7	23,8	38,1	51	109,5	300	0,31	613012
12	38,1	33,3	51	63,5	138	650	0,60	613013
16	44,5	39,6	60,7	76,2	166,7	1000	1,06	613014
19	51	44,5	66,7	88,9	182,6	2000	1,648	613015

EMERILLON - SIMPLE GRAND ŒIL

Galvanisé à chaud, Marqué CEE, C.M.U, fabricant - Ratio sécurité: 5:1
Hot dipped galvanized, stamped CEE, W.L.L. brand - Safety ratio: 5:1

Diam. mm	D mm	C mm	B mm	C.M.U W.L.L. Kg	Poids Kg/pc	Réf.
8	19	25,4	20,5	560	0,11	613001
10	25,4	31,75	23,8	1130	0,24	613002
12	31,75	38,1	33,2	1630	0,51	613003
15	38,1	44,45	39,6	2350	0,95	613004
20	44,45	50,8	44,4	3260	1,40	613005

C.M.U. : Charge Maximale d'Utilisation = W.L.L. : Working Load Limit


Route de Roquecourbe,
81120 Réalmont, France

Tél : 00 (33) 5 63 79 25 70
Fax : 00 (33) 5 63 79 25 79

<https://www.vigouroux-sea.fr>
vigouroux@vigouroux.fr

Maillon rapide

Quick link

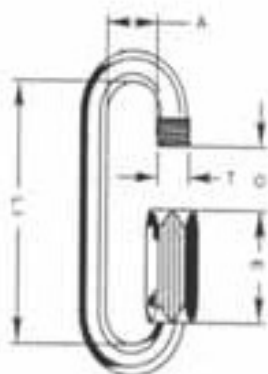

MAILLON RAPIDE - OUVERTURE NORMALE INOX 316

Marqué CEE, C.M.U. fabricant - Ratio sécurité: 5:1

Stainless steel (316), stamped CEE, W.L.L. brand - Safety ratio: 5:1

Diam. mm	O mm	LI mm	A mm	C.M.U. W.L.L. Kg	C.R. B.L.L. Kg	Poids g/pc	Réf.
3	4	25	8,5	160	800	5	665001
3,5	5	29	10	220	1100	8	665002
4	5,5	31,5	11,5	280	1400	12	665003
5	6,5	39,5	13	450	2250	21	665004
6	7,5	45	14,5	650	3250	35	665005
7	8,5	52	16	900	4500	53	665006
8	11	58	17,5	1100	5500	79	665007
9	11	62	19	1400	7000	105	665008
10	12	69	20,5	1800	9000	140	665009
12	15	80,5	23,5	2250	12500	238	665010
14	17	93	26,5	3500	17500	374	665011
16	19	108	29,5	4500	22500	576	665012

MAILLON RAPIDE - GRANDE OUVERTURE INOX 316

Marqué CEE, C.M.U. fabricant - Ratio sécurité: 5:1

Stainless steel (316), stamped CEE, W.L.L. brand - Safety ratio: 5:1


Diam	O mm	LI mm	A mm	C.M.U. W.L.L. Kg	C.R. B.L.L. Kg	Poids g/pc	Réf.
6	14,5	58,5	14,5	580	2900	42	665101
7	16	65	16	800	4000	61	665102
8	17,5	72	17,5	980	4900	93	665103
9	19	77	19	1250	6250	121	665104
10	20,5	85,5	20,5	1600	8000	161	665105
12	23,5	100	23,5	2200	11000	274	665106
14	26,5	114	26,5	3100	15500	430	665107
16	29,5	129	29,5	4000	20000	645	665108

C.M.U. : Charge Maximale d'Utilisation = W.L.L. : Working Load Limit / C.R. : Charge de rupture = B.L.L. : Breaking Load Limit

Manille


Shackle

Diam. mm	H mm	B mm	d mm	Poids g/pc	Réf.
4	16	8	4	10	661000
5	19	10	5	13	661001
6	24	12	6	23	661002
8	32	16	8	55	661003
10	40	20	10	109	661004
12	48	25	12	200	661005
14	56	29	14	346	661006
16	56	32	16	370	661007

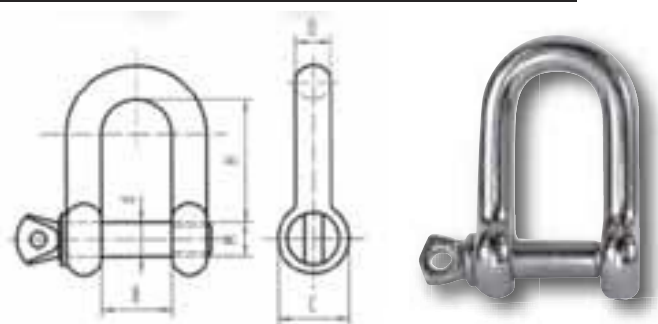

INOX 316 - STAINLESS STEEL (316)


Diam. mm	H mm	B mm	d mm	2r mm	Poids g/pc	Réf.
5	19	10	5	15	20	661101
6	24	12	6	18	30	661102
8	32	16	8	24	70	661103
10	40	20	10	30	130	661104
12	49	25	12	36	220	661105
14	56	30	14	43	350	661108
16	64	32	16	56	400	661107

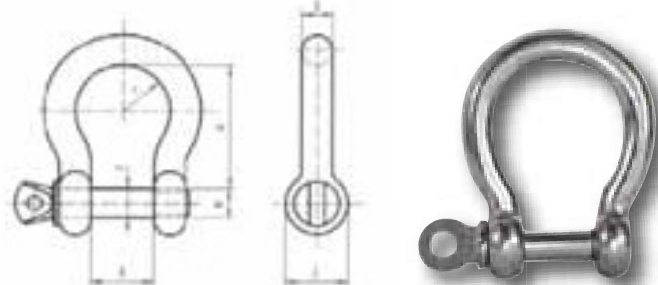

Cosse cœur

Thimble

INOX 316 - STAINLESS STEEL (316)



Diam. mm	C mm	B mm	F mm	Poids g/pc	Réf.
2	9	19,5	2,5	2	660 400
3	11	23,5	3,5	3	660 401
4	13	28,5	5	5	660 402
5	14	30	6	7	660 403
6	15	33	7	9	660 404
8	18	39	9	16	660 405
10	22	47,5	11	28	660 406
12	26	56,5	13	48	660 407
14	28	61	14	50	660 408
16	37	64	22	72	660 409
18	40	70	24	100	660 410
20	45	75	27	124	660 411
22	53	88	30	186	660 412
24	58	92	32	260	660 413



Route de Roquecourbe,
81120 Réalmont, France

Tél : 00 (33) 5 63 79 25 70
Fax : 00 (33) 5 63 79 25 79

<https://www.vigouroux-sea.fr>
vigouroux@vigouroux.fr



Serre-câble

Wire rope clip




SERRE CABLE A ETRIER - INOX316
WIRE ROPE CLIP

Diam. mm	O mm	H mm	L mm	h mm	E mm	L1 mm	Poids g/pc	Réf.
2	6,6	15	19	9	10	9	8	666000
3	9	16	21	10	12	10	9	666010
4	9	18,5	21	10	12	10	11	666001
5	11	19	23	10	13	11	15	666011
6	13	23	26	11	15	12	18	666002
8	16	28	30	15	19	14	34	666003
10	19	34	34	17	22	18	64	666004
11/12	20	36	36	18	22	19	70	666005
14	25	47	44	22	30	23	158	666006
16	29	51	50	26	33	26	207	666007



SERRE CABLE PLAT - 1 BOULON - INOX316
SIMPLEX WIRE ROPE CLIP

Diam mm	b	d	h	l	Poids g/pc	Réf.
2	12,6	M4	5	18	7	666100
3	14	M4	6,5	20	8	666101
4	17	M5	7	21	10	666102
5	21	M6	8,5	26	14	666103
6	25	M6	10	30	22	666104




SERRE CABLE PLAT - 2 BOULONS - INOX316
DUPLEX WIRE ROPE CLIP

Diam. mm	b mm	d mm	h mm	l mm	Poids g/pc	Réf.
2	12,6	M4	5	37	10	666200
3	14	M4	7	40	15	666201
4	17	M5	7	43	22	666202
5	21	M6	8	52	38	666203
6	25	M6	10	60	55	666204
8	31	M8	14	72	92	666205
10	35	M10	15	84	186	666206

Mousqueton


Snap hook

Diam mm	L mm	D mm	C mm	2 R mm	Poids g/pc	Réf.
5	50	8	7	15	16	664300
6	60	9	8	18	26	664301
8	80	12	9	24	63	664302
10	100	15	11	30	125	664303
11	120	18	16	36	192	664304




MOUSQUETON ALPIN INOX316

Diam mm	L mm	C mm	2 R mm	Poids g/pc	Réf.
6	60	8	15	28	664201
8	80	9	24	68	664202
10	100	11	30	132	664203
11	120	16	36	190	664204




MOUSQUETON ALPIN A ŒIL INOX316

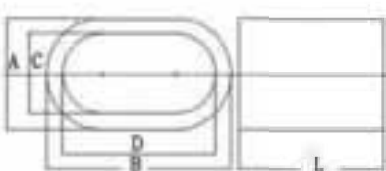

Aluminium

Diam. câble mm	A mm	B mm	C mm	D mm	L mm	Poids g/pc	Réf.
1	3	5	1,2	2	5	0,01	606039
1,5	3,5	5,3	1,8	3,6	6	0,21	606038
2	4,5	6,9	2,4	4,8	7	0,24	606040
2,5	5,1	8,1	3	6	9	0,50	606041
3	6,1	9,6	3,5	7	11	0,84	606042
4	7,9	12,4	4,5	9	14	1,81	606044
5	9,8	15,4	5,6	11,2	18	3,57	606045
6	11,6	18,2	6,6	13,2	21	5,86	606046

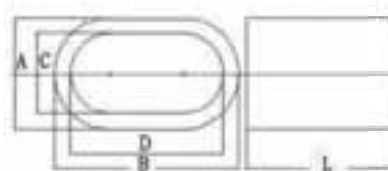

Copper

Diam. câble mm	A mm	B mm	C mm	D mm	L mm	Poids g/pc	Réf.
2	4,5	6,9	2,4	4,8	7	1	606050
2,5	5,1	8,1	3	6	9	2	606051
3	6,1	9,6	3,5	7	11	3	606052
4	7,9	12,2	4,4	8,6	14	6	606053
5	9,7	15,3	5,3	10,8	18	20	606054